

Installation guide and user manual

LUX

Bathroom vanity



The information in this manual is applicable to the following models:

- LUX-V112
- LUX-V119
- LUX-V121
- LUX-V871
- LUX-V888
- LUX-V980
- LUX-V998

IMPORTANT

Read and save these instructions

AVIS

Installer: Leave this guide with the homeowner

Homeowner: Keep this guide for future reference

Important Safety Notice

Read all Instructions before Installing and operating this shower panel

- The installation instructions in this manual are intended for qualified installers, service technicians or persons with similar qualified background.
- Installation and plumbing must be done by a qualified plumber and in accordance with all applicable plumbing and building codes in force in your area.
- Bathroom vanity may have very sharp edges; please wear protective gloves if it is necessary to remove any parts for installing, cleaning or servicing.
- Due to the size and weight of this bathroom vanity, it is recommended that two people handle the installation.

To reduce the risk of leak or injury:

- This bathroom vanity is for residential use only.
- Before servicing the shower panel, switch OFF quarter-turn tap to prevent any leak.
- ALWAYS check if the pipes are grounded.
- When cutting or drilling into a wall, take care not to damage electrical wiring or other hidden utilities.
- Check all joints on ceramic to avoid any future water infiltration.
- Use this bathroom vanity only in the manner intended by the manufacturer. If you have questions, contact LUX.

To reduce the risk of limestone deposit:

- Keep bathroom vanity clean; limestone deposits should not be allowed to accumulate on basin as well.
- Frequently clean the bathroom vanity with hot soapy water and a cotton cloth.

Your safety and the safety of others is paramount. We have provided many important safety instructions in this manual. Read and obey all safety instructions. Safety instructions will tell you what the potential hazard is, how to reduce the chance of injury, and tell you what can happen if the instructions are not followed.



This is the safety alert symbol. It alerts you to potential hazards. All safety messages will follow the safety alert symbol and the word "WARNING".

The manufacturer and/or distributor/reseller declines all responsibility in the event of failure to observe the instructions given here for installation, maintenance and suitable use of the product.

The manufacturer and/or distributor/reseller further declines all responsibility for injury due to negligence.

The warranty of the unit automatically expires due to improper maintenance.

The manufacturer and/or distributor/reseller will not be held responsible for any damages to personal property or real estate or any bodily injuries, whether caused directly or indirectly by the bathroom vanity.

Table of Contents

INSTALLATION

Tools needed

Parts supplied

Features

Assembly of vanity’s extra components

Installation

Plumbing access

Door adjustment

3

4

5

5-6

7-10

11-15

15-16

MAINTENANCE

Cleaning

17

WARRANTY

Coverage & exceptions

Disclaimer & contact information

18

19-20

Tools needed



Other tools may be required depending on the particulars of the installation.

Parts supplied

Anchors




Screws



Pop-up drain with overflow
(only packed with bassin)



Steel wall support

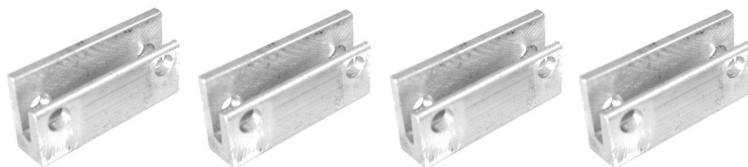

Bolts & Nuts



Quantities may vary depending on models



WARNING

Severe Injury

Bathroom vanity may have very sharp edges. Please wear protective gloves if it is necessary to remove any parts for installation, cleaning or service.



WARNING

Severe Injury

For your protection, always wear safety glasses during installation process.

Installation

Wall-mounted (floating) vanity


This vanity is very easy to install! Only a few hours are needed to complete the installation.

Depending on the type of plumbing already in place in your bathroom, you might need to change the configuration of the hot and cold water outlet pipes so that they come out of the wall not the floor.

In this case, you need to determine where you will place your vanity and then draw its contour on the wall in order to ascertain the proper height at which the water outlets need to exit the wall.

Before you start the installation, close your shut-off valves! (Figure 1)

Fig 1

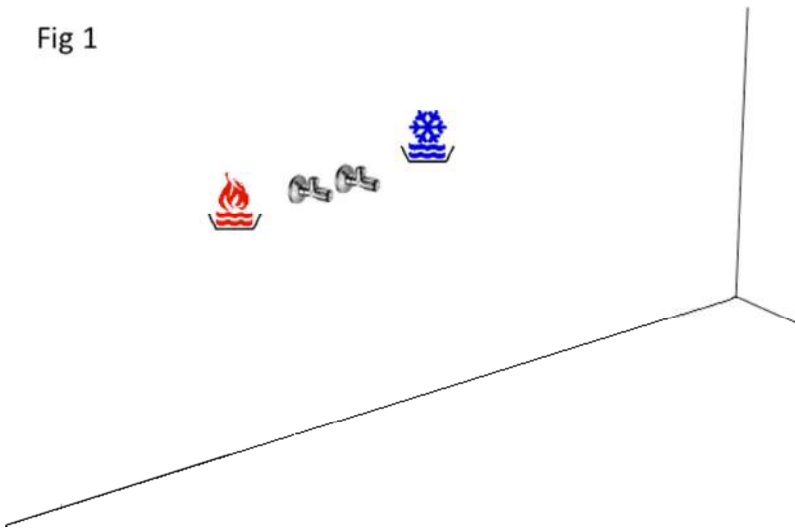

To avoid breaking something, remove all cumbersome items and items not used in the installation of the vanity from your workspace. Handle each item with caution.

Carefully unwrap the vanity and basin.




WARNING

Protecting your floors

Use the cardboard boxes to protect your floor when the different pieces of the vanity are on it.


Secure the wall-mounting brackets to the vanity, if they are not already installed, in the marked locations. Place the vanity on the ground and install the basin on top of it and take all measurements necessary to install the set.


Draw a line on the wall indicating the final height of the top of the basin (recommended between 32" and 36" from the ground) and transfer all the measurements that will enable you to install the vanity and its wall-mounting brackets. (Figure 2)

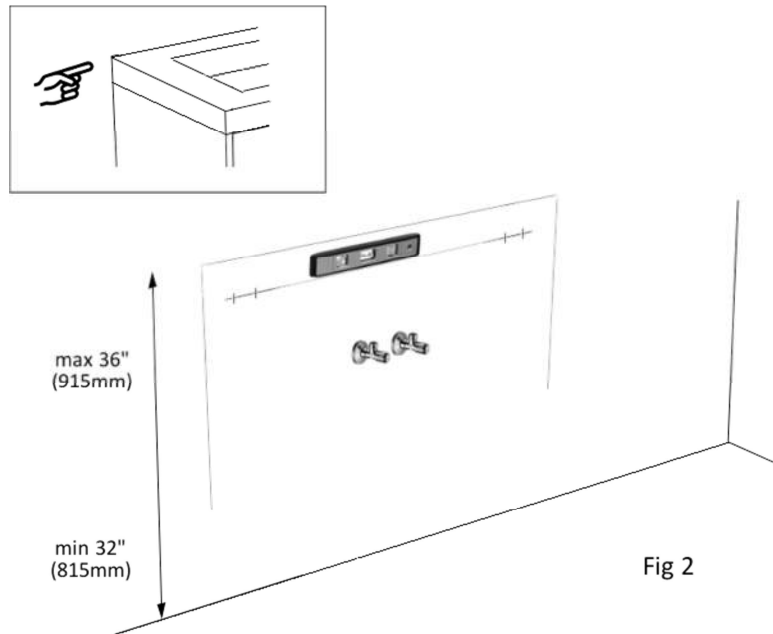

Make sure all your markings are level and plumb. Make sure that the back panel of the vanity features the opening for the piping. If it does not, punch out the openings with a punch.

Once this is done, carefully unwrap the mirror in order to measure it and transfer the measurements onto the wall at the desired height. (Figure 3)

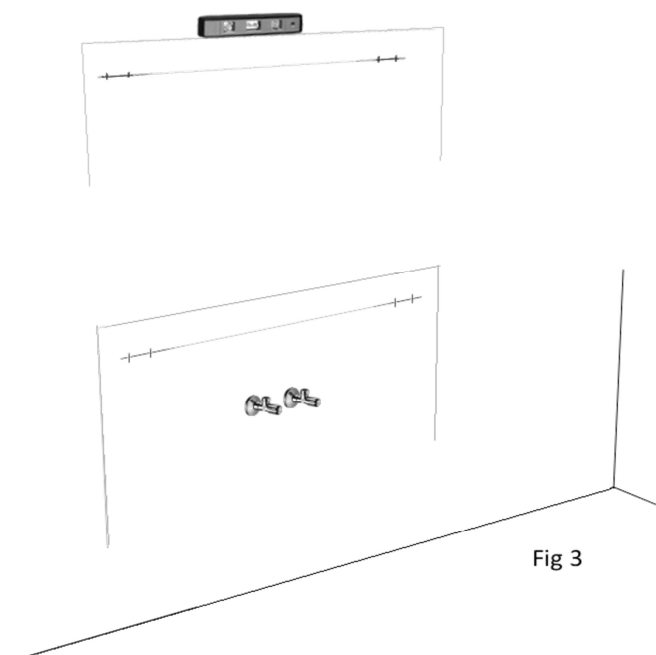

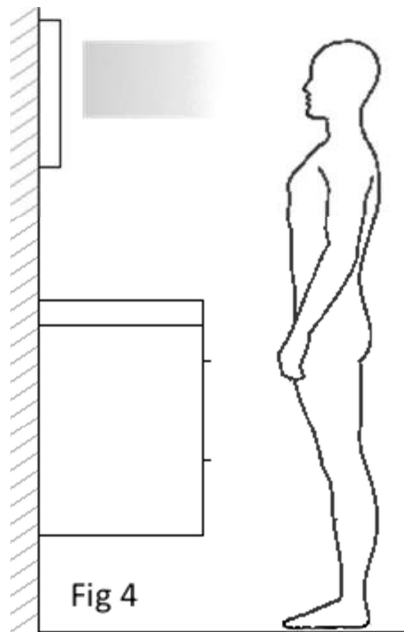


We suggest you place the middle of the mirror at the height of your face, but also take into account the height of the other people who will be using the vanity. (Figure 4)


IMPORTANT: Make sure the mirror is not too low as to impede the installation of the faucet and make sure you leave enough room to install a shelf, if applicable.

Find the location of the wall-mounting brackets and transfer their measurements onto the wall.

Repeat these same steps for the installation of a side-cabinet. Install the cabinet at the same height (align the tops) as the mirror. Leave at least a 2" space between the vanity and the side-cabinet. (Figure 5)

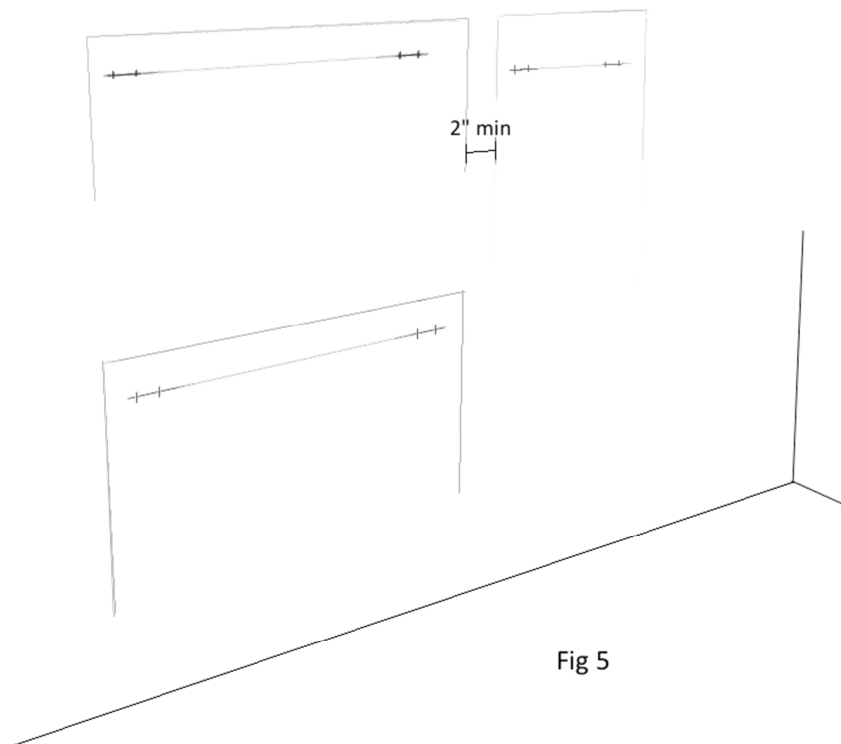

Drill the holes of all the wall-mounting brackets and insert in each hole an anchor appropriate for your type of wall. Screw the brackets to the wall and make sure they are level. (Figure 6)

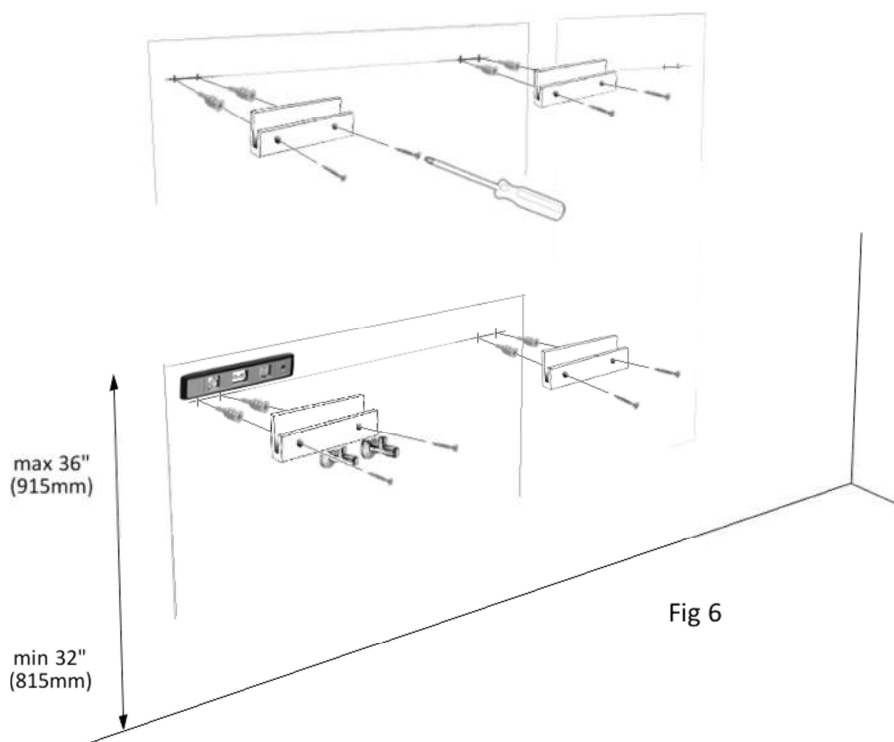

WARNING

Severe injury

For your protection, always wear safety glasses to install this product..



WARNING

Excessive Weight

At least two people are required to move and install this range hood. Back or other injuries could occur if it this warning is not followed.

To avoid any breaks, start by carefully hanging the mirror. (Figure 7)

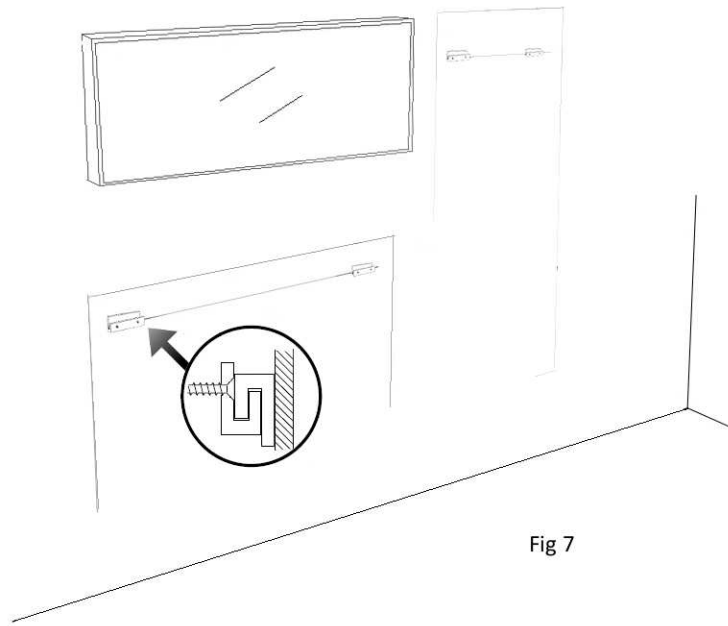


Fig 7

Then, install the vanity and basin on their brackets on the wall. (Figure 8)

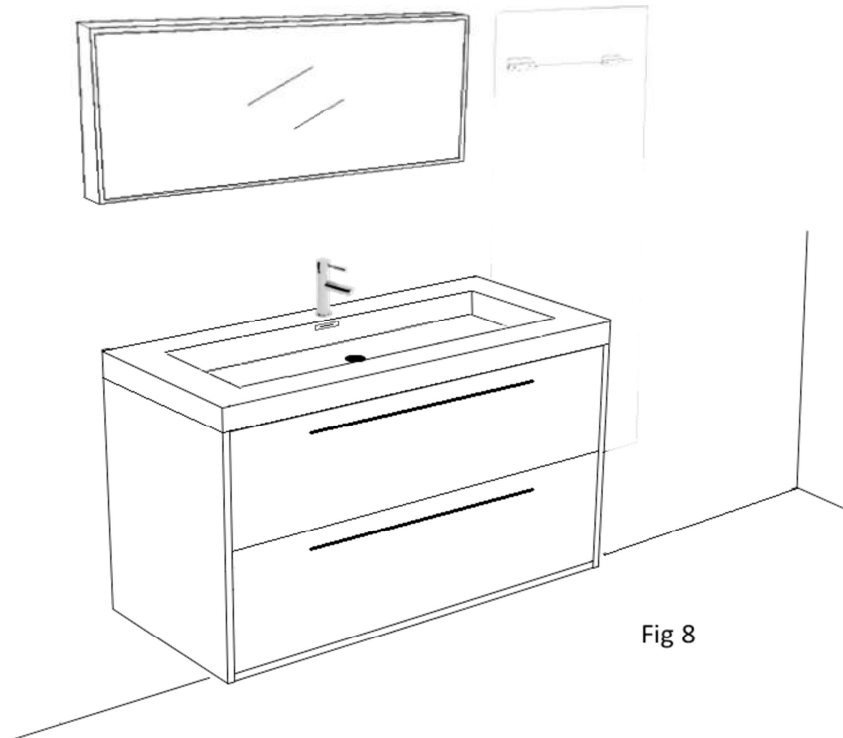


Fig 8

As a precaution, install the faucet on the basin before installing the basin on the vanity. Connect the plumbing elements (pipes and drain). Apply a joint of silicone between the basin and wall to ensure leak-proofing.

Please note that our basin come with an integrated overflow drain as well as a pop-up drain.

Finally, install the side-cabinet its brackets on the wall. (Figure 9)

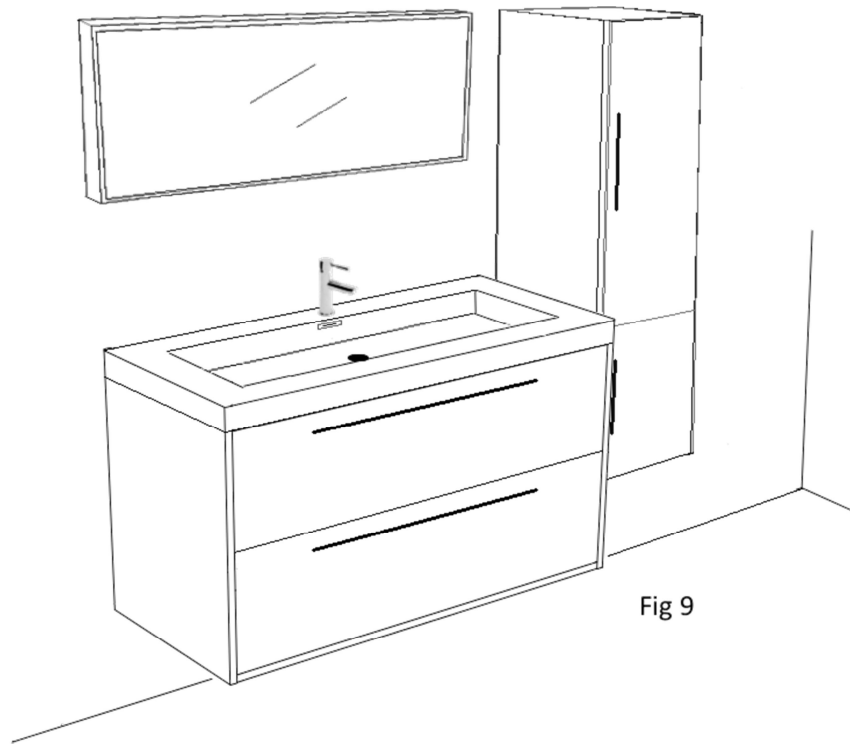


Fig 9

Freestanding vanity

The installation of the freestanding vanities is the same as that of the wall-mounted vanities, except that the legs must be screwed onto the vanity before installation.

Once the vanity is unwrapped and its legs screwed on, transfer its measurements onto the wall as mentioned in the above instructions. Then, attach the vanity to the wall with its brackets, using anchor appropriate for your type of wall, and bind the basin to the vanity with a joint of silicone.

Accessing the plumbing elements *after the installation of the vanity*


a. Screwed-on sliding mechanism

If you need to access the plumbing without detaching the vanity from the wall, we recommend you carefully remove the drawers in the following manner:

Completely open the drawer in order to access the screws located under it. (Figure 10)




Unscrew the 4 screws and place them in a safe location. (Figure 11)

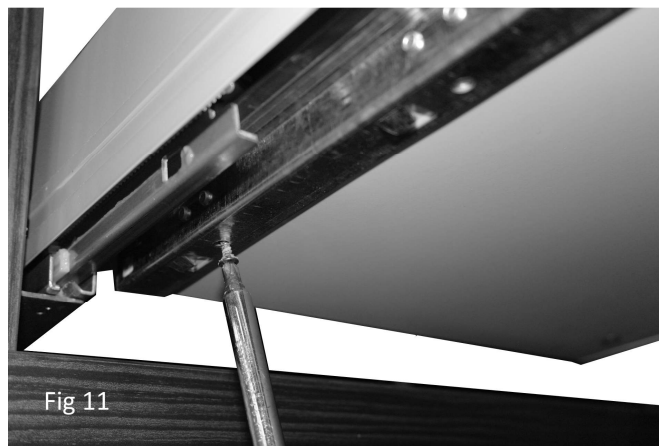

Carefully remove the protective patch on both sides of the drawer. (Figure 12)




Slightly raise the plastic tongue (Figure 13a) to release the drawer from the sliding mechanism. (Figure 13b)

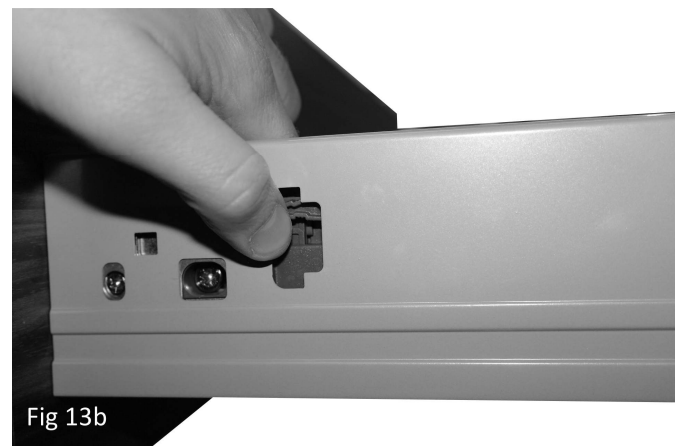

Gently pull the drawer towards you without forcing it (Figure 14a view from underneath) and carefully lift it off. (Figure 14b)



Make sure the drawer is unclipped on both sides before completely lifting it off the sliding mechanism. (Figure 15)

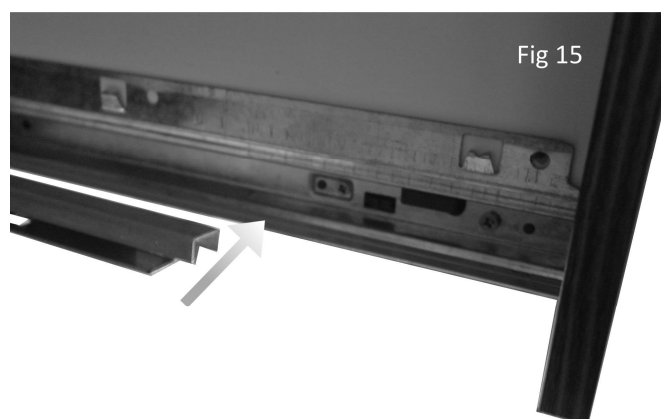

b. Clip-on sliding mechanism

Disassembly

Verify that the sliding mechanism is a clip-on type of mechanism by looking under the drawer. You must see a plastic tab. (Figure 16)

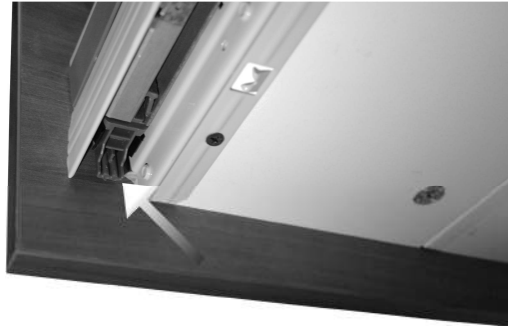


Fig 16

Pull the drawer towards you (Figure 17) until it is completely open. (Figure 18)



Fig 17



Fig 18

Grasp the bottom of the drawer and gently lift it up (Figure 19).



Fig 19

Once the drawer has cleared the runner, gently remove it (Figure 20) ensuring it clears the lock-pin. (Figure 21)



Fig 20



Fig 21

Assembly

Pull out the sliding mechanism to its maximum length (Figure 22) and place the drawer on it. Slide the drawer onto the mechanism while holding the grey stoppers on each side. (Figure 23)



Fig 22

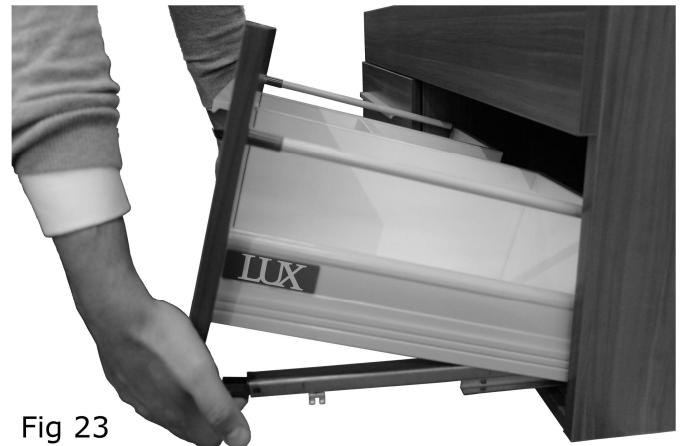


Fig 23

Once the back of the drawer has cleared the lock-pin, lower the drawer and clip it onto the sliding mechanism. (Figure 24)

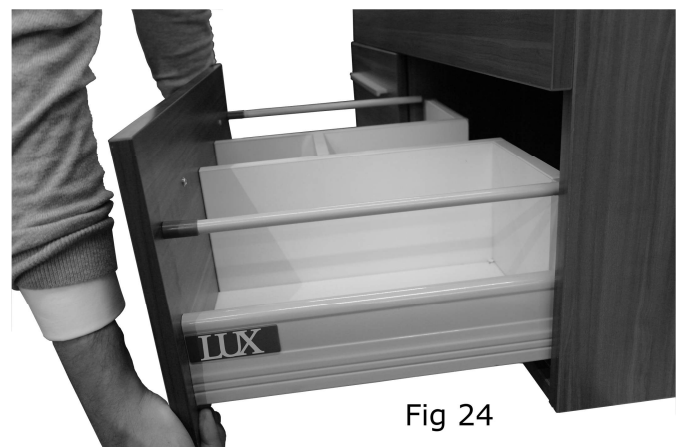


Fig 24

Try the drawer without forcing it to ensure it is properly assembled. (Figure 25)



Fig 25

Adjustment of the doors


Your door does not close properly? It gets stuck or is no longer aligned with the cabinet box?

Before making any adjustments, ensure the cabinet is level and plumb. Try moving the cabinet by tilting it a little to see if it is properly anchored in the brackets, which could fix the alignment of the doors.




Use a Philips screw driver to adjust the door hinges. Two types of adjustment are possible:


- a. left to right, to align the doors with the box of the unit;
- b. front to back, to move the door closer to or away from the box of the unit.

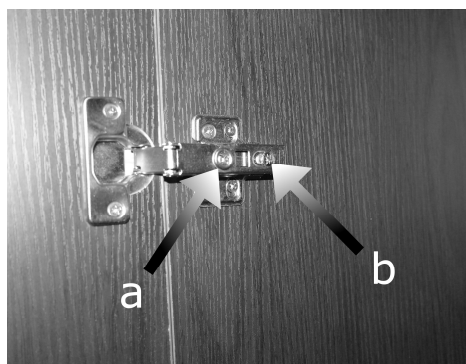

The screw labeled “**a**” enables you to align the door with the rest of the unit so that it closes properly.

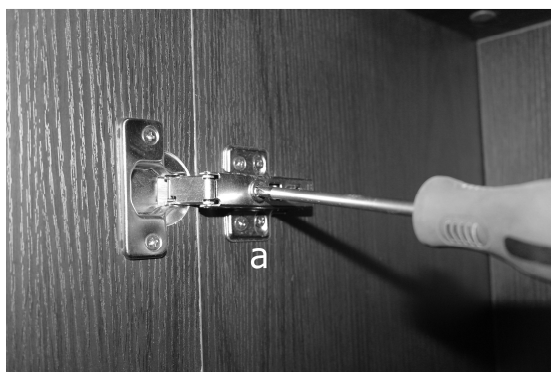

The screw labeled “**b**” enables you to move the door forward or backward, depending on whether you screw it or unscrew it. This will bring the door closer to the box of the unit or move it away from it.

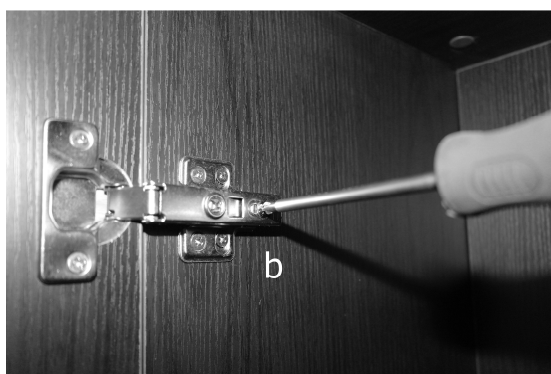

Cleaning and maintenance

Your bathroom vanity is made of top quality materials and requires no special maintenance. It is advised to wipe any excess water from basin surfaces to prevent staining.



WARNING

Reminder

Never use abrasive products for the cleaning of your shower panel.

If you want to use a cleaning product, test it first on an inconspicuous part of the vanity. Acid should not be used for the cleaning of any part of your bathroom vanity.

Maintenance

LIME DEPOSIT

Do not use a scrubbing cloth on the surface as this will scratch the anti-fingerprint coating. Use a soft cloth and an appropriately mild detergent. Rinse with cold water.

SLIDES AND HINGES

Never use force to close the drawers or doors as they are soft close equipped in order to protect kids from any injuries and increase your vanity life-cycle. In case of spare parts needed due to broken pieces, contact LUX.

SCRATCHES

For scratches on your vanity, use pencil retouching in direction of scratch. For worn areas, you must touch-up in direction of wood grain. Rub of excess colorant promptly with a soft cloth.

Warranty

TO OBTAIN SERVICE UNDER WARRANTY: You must present proof of original purchase.

Please provide an original, dated proof of purchase (sales receipt / invoice) in order to obtain service under the warranty.

Coverage & exceptions

1-year parts warranty:

For one year from the date of original purchase, your local reseller will provide free of charge, non-consumable replacement parts or components that failed due to manufacturing defects. Subject to the conditions and limitations set forth below, your local reseller will, at its discretion, either repair or replace any part of its products that prove defective by reason of improper workmanship or materials.

Repaired parts or replacement products will be provided by your local reseller on an exchange basis, and will be either new or refurbished to be functionally equivalent to new. The consumer is responsible for all shipping costs.

This warranty is extended to the original purchaser for products purchased for ordinary home use.

Limitations

This warranty will be voided if the product is damaged through negligence, improper installation, accident, abuse, misuse, natural disaster, insufficient or excessive water pressure, abnormal mechanical or environmental conditions, or any unauthorized disassembly, repair, modification, or failure to follow installation instructions correctly.

It will also be voided if:

- the product is used commercially or other than for its intended purpose.
- the product is damaged because of improper connection with equipment of other manufacturers, or repaired or modified by anyone other than your local reseller's authorized agents.

This limited warranty also does not apply to any product on which the original identification information has been altered, obliterated or removed, has not been handled or packaged correctly, or has been sold as second hand.

What is not covered

This warranty does not cover: 1) the natural wear of the finish or wear due to improper maintenance, use of corrosive and/or abrasive cleaning products or wool pads; 2) chips, dents or cracks due to abuse, misuse, freight damage, or improper installation; 3) damage caused by accident, fire, floods or Acts of God.

The manufacturer and/or distributor/reseller is not liable for, and does not cover under warranty, any loss of properties or any costs associated with removing, servicing, installing or determining the source of problems with this product.

This warranty is valid in the country of the original purchase at retail. It is non-transferable, applies only to the original purchaser, and does not extend to subsequent owners of this product.

To obtain warranty service, you may contact your local reseller from which you purchased this product. Please confirm the terms of your local reseller's policies prior to making contact. Typically, you must include product identification information, including model number and serial number, along with a detailed description of the problem you are experiencing.

You must also include proof of the date of original retail purchase as evidence that the product is within the applicable warranty period.

Disclaimer

Carefully inspect all items for damages before accepting delivery. Note any damages on the freight bill or express receipt. Request name and signature of the carrier's agent and keep a copy to support your claim.

Upon acceptance of items, the owner assumes responsibility for its safe arrival. Report damages to the carrier and file a claim immediately. Failure to do so may result in the denial of your claim. The carrier will furnish you with necessary forms for filing a claim.

Damages caused during transit are not covered under our warranty. Please contact us to file an insurance claim. Inspect contents of package(s) carefully upon reception. We must be notified of any damages and/or missing parts within five (5) days upon your receipt of package(s). Claims will not be accepted after five (5) days.

NOTE: Items were thoroughly tested and carefully packed in our factory before shipping.

Products must be returned in good working condition with ALL original parts and documentation packed in ALL original cartons, fillers and shipping cartons. A re-stocking fee of 25% will be charged for all approved returns.

Exchanges or returns may not be accepted if any packaging is missing.

Make sure to inspect the shower panel for damages and defects before installation. Appearance flaws of the shower panel found after installation and not affecting performance are not covered under our warranty for returns or exchanges.

Service visits not covered under warranty will carry a service charge.

Before Installation: Return for exchange or refund (please see above for acceptable returns).

After Installation: **NO** exchange or refund.



WARNING

Reminder

No reimbursements will be authorized on products that are not in their original packaging.

Contact Us

If you need assistance, please contact your local reseller. Please have your order number and model of the Shower panel ready. This information will help the reseller better respond to your request.

If you need replacement parts, we recommend that you only use genuine parts. Our accessories and parts are engineered and designed specifically for this series of shower panel, with each one rigorously tested to ensure the utmost in durability and reliability, providing a factory match, factory-installed appearance, and with functionality tailored to each individual shower panel model.

Please contact LUX before returning any product. If you are missing parts or experiencing problems with your installation, our customer service department will be happy to assist you.

**LUX Customer Service:
987 Pierre-Dupuy, Longueuil, Québec, J4K 1A1
450-674-8181 Email: info@rlqc.ca**